

## IPSS SERIES

### SEMI-FLUSH MOUNT PRESSURE TRANSMITTER



The semi-flush mount pressure transmitter, IPSS, has a piezo-resistive silicon or ceramic pressure sensor. The sensor is semi-flush to the housing making this product ideal for viscous or paste like media. The sensor and housing are made from stainless steel with a choice of internal 'O' ring seals to ensure the product is suitable for a wide range of applications.

The electronics incorporate a microprocessor-based amplifier, requiring no adjusting and giving stable electronics - especially in high vibration or shock applications.

Every device is temperature compensated, calibrated and supplied with a traceable serial number and calibration data.\*

\*Calibration data is supplied as a sticker affixed to the product packaging - do not discard.

#### Features

- Piezo-resistive sensor, Ceramic
- Accuracy  $\leq \pm 0.25\%$  FS BFS
- mA output available
- Pressure ranges from -1 Bar to +19Bars
- Pressure reference, Gauge or Absolute
- 3/4" BSP Pressure port connection

#### Suitable Applications

- Environmental engineering
- Static tank level
- Viscous and paste-like media
- Composite manufacturing
- Process control
- Automotive testing
- Process pumping
- Sewage or grey water
- Injection moulding or infusion
- Aggressive media

CE UK  
CA



#### SPECIFICATIONS

#### Performance

<b>Accuracy (Non-linearity &amp; Hysteresis)</b>	$\leq \pm 0.25\%$ / FS (BFS)	
<b>Setting Errors (Offsets)</b>	2-wire	Zero & Full Scale, $\leq \pm 0.5\%$ / FS
<b>Permissible Load</b>	2-wire	$R_{max} = [(VS - VS_{min}) / 0.02] \Omega$
<b>Influence Effects</b>	Supply	$< 0.005\%$ FS / 1V
	Load	0.05% FSO / $k\Omega$

## Material

<b>Housing</b>	303 Stainless Steel
<b>"O" Ring Seals</b>	Viton
<b>Diaphragm</b>	316L Stainless Steel or Ceramic
<b>Media Wetted Parts</b>	Housing & process connection, 'O' ring seal, diaphragm

## Miscellaneous

<b>Current Consumption</b>	2-wire Limits at 28mA
<b>Weight</b>	Approx 100g
<b>Installation Position</b>	Any, small zero shift when tilted through 90° for silicon
<b>Operation Life</b>	> 100 x 10 <sup>6</sup> cycles
<b>Insulation Resistance</b>	> 50MOhms at 50Vdc

## Electrical Protection

<b>Supply Reverse Polarity</b>	No damage/no function
<b>Electromagnetic Compatibility</b>	UKCA, CE EMC directive · BS EN 61326-1:2013

## Environmental Conditions

<b>Shock</b>	100g / 11s
<b>Vibration</b>	10g RMS (20 - 2000Hz)
<b>Media Temperature</b>	-40°C to +125°C
<b>Ambient Temperature</b>	-20°C to +80°C
<b>Storage Temperature</b>	-40°C to +125°C
<b>Humidity</b>	5% to 95% RH non-condensing

## Temperature & Thermal Effects

<b>Compensated Temperature</b>	+20°C to +80°C
<b>Thermal Zero Shift (TZS)</b>	<±0.04% /FS/°C
<b>Thermal Span Shift (TSS)</b>	<-0.015% /°C



## PRESSURE RANGES


### Input Pressure Ranges

<b>Nominal Pressure, Gauge</b>	Bar	2	5	
<b>Nominal Pressure Absolute</b>	Bar	2		
<b>Nominal Pressure Compound</b>	Bar		-1 to +5	-1 to +19
<b>Permissible Overpressure</b>	Bar	4	10	35

## Output Signal & Supply Voltage

## Wiring Designation

Wire System	Output	Supply Volts	Connection	Pin No. (M12 4-pin connector)
2-wire	4 - 20mA	9 – 32V dc	+ve Supply	Pin 1
			-ve Supply	Pin 2
			Ground	Pin 3




Part No	Sensor type	Pressure Range	Output
IPSS-G2000-5C	Ceramic	0-2 Bar G (0-29psi)	4-20mA
IPSS-G5000-5C	Ceramic	0-5 Bar G (0-73psi)	4-20mA
IPSS-GM1P5-5C	Ceramic	-1 to +5 Bar G (-14.5 to +73psi)	4-20mA
IPSS-C0072-5C	Ceramic	-1 to +19 Bar G (-14.5 to +276psi)	4-20mA
IPSS-A2000-5C	Ceramic	0-2 Bar Abs (0-29psiA)	4-20mA



## DIMENSIONS

All dimensions are in millimeters.

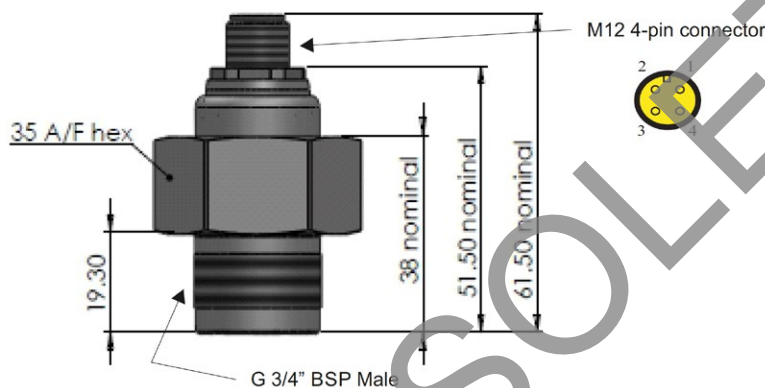

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at [www.sensata.com](http://www.sensata.com) SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

## CONTACT US

+44 (0)1202 897969  
support@sensata.com  
Sensata | Cynergy3  
7 Cobham Road,  
Ferndown Industrial Estate,  
Wimborne, Dorset,  
BH21 7PE, United Kingdom