


Data sheet

Commercial Art.No.: R1.180.0430.0

PLC digital I/O-module SA-OR-S1-4RK-C DC 24V

samos output module, 2x2 enabling current paths 2x2 signalling output, DC 24 V, push-in-terminals pluggable

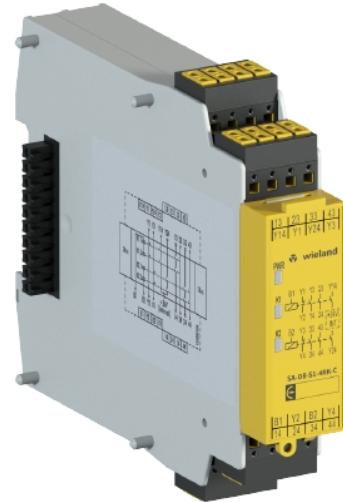

Commercial Art.No.	R1.180.0430.0
EAN	4046521297761
Order Unit	1

certificates / approvals



Technical data

general

SIL according to IEC 61508	3
in-/outputs configurable	yes

connection data

type of electric connection	spring clamp connection
-----------------------------	-------------------------

safety parameters

category (ISO 13849-1)	4
PL (ISO 13849-1)	Level e
SIL _{CL} (IEC 62061)	3
HFT	1
T _M	20 a

output circuit

number of outputs	6
output current	6 A
short-circuit protection, outputs	no
type of digital output	relay
min. allowed output voltage	5 V
max. allowed output voltage	230 V

other

suitable for safety functions	yes
type of supply voltage	DC

control circuit

number of inputs	0
------------------	---

supply circuit

min. supply voltage at DC	19.2 V
max. supply voltage at DC	30 V

dimensions

depth	121 mm
width	22.5 mm
height	96.5 mm

classification



ECLASS 11	
ECLASS 8.1	27242204
ETIM 9.0	EC001419
ETIM 8.0	EC001419
ETIM 7.0	EC001419
ETIM 6.0	EC001419
ETIM 5.0	EC001419
ETIM 4.0	EC001419
ETIM 3.0	EC001419

product compliance

ROHS conformity status	compliant/exempted
ROHS exceptions	III-7(c)I
REACH-SVHC conformity status	compliant

Wieland electric reserves the right to change the design of the product without notice.
Wieland electric sich das Recht vorbehält, das Aussehen des Produkts ohne Vorwarnung zu ändern.
Wieland electric reserves the right to change the design of the product without notice.
The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited.

01-QU-RD-31/21

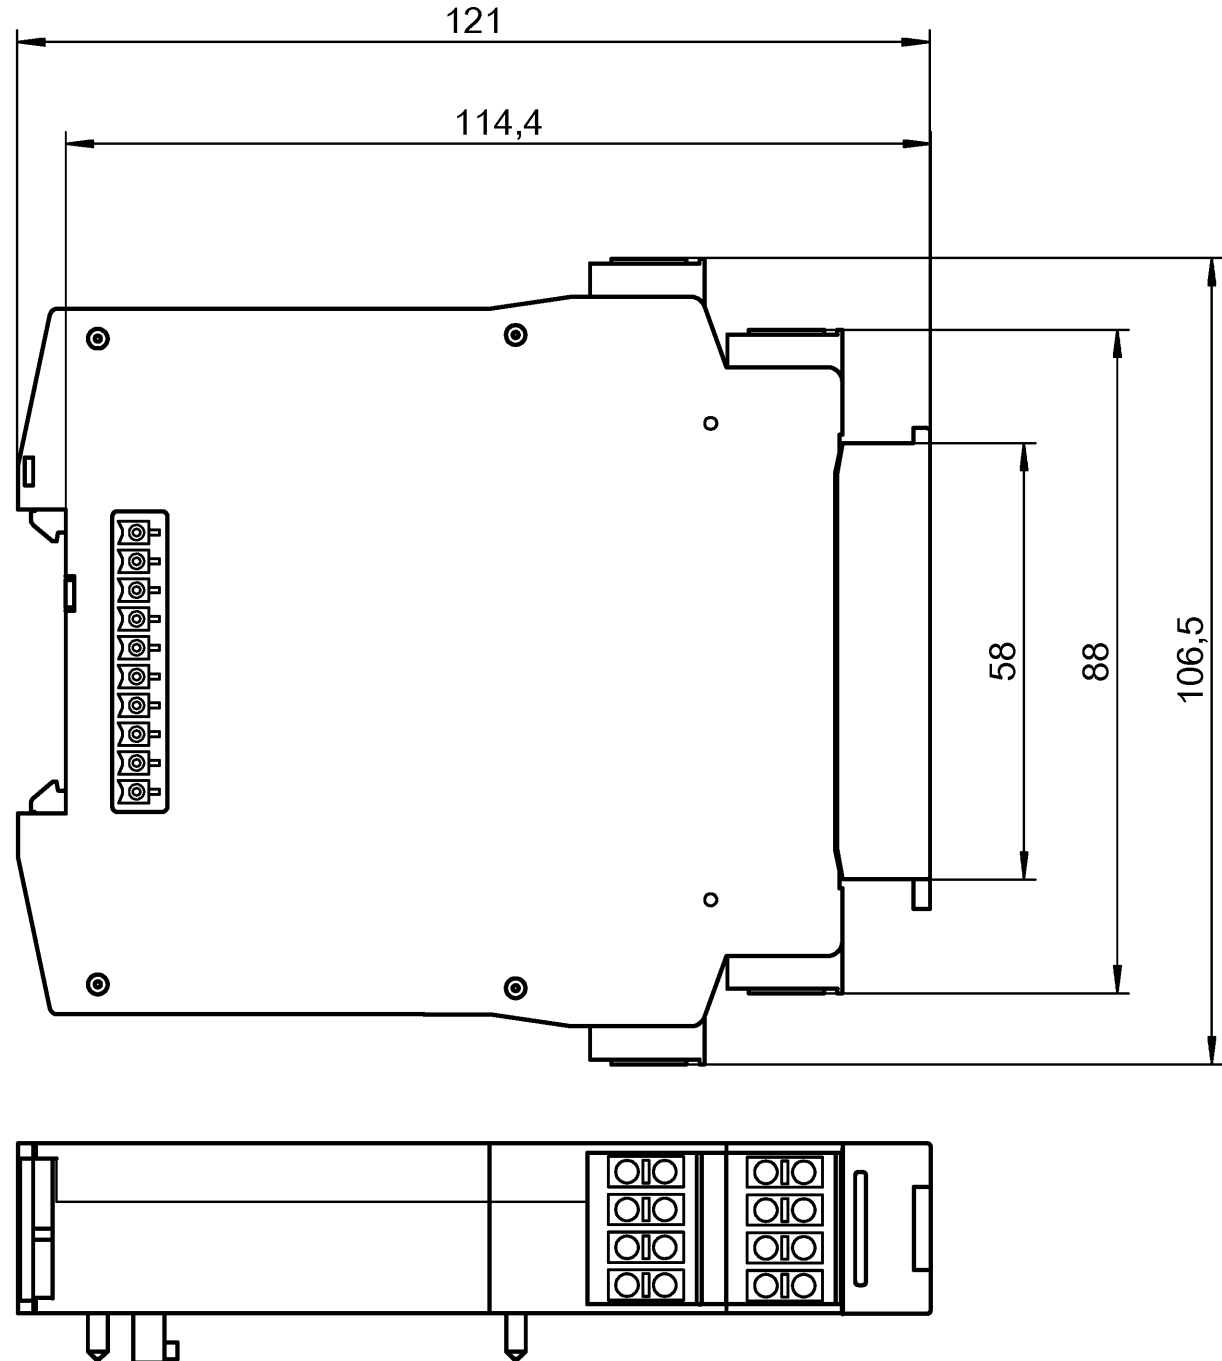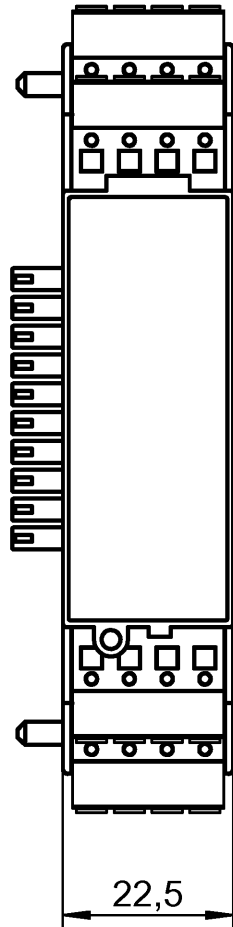

Weitere Angaben siehe KATALOG oder eKatalog.
Additional data see CATALOG or eCatalog.

www.wieland-electric.com
eshop.wieland-electric.com

ja/yes ☐ Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten. Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!	
Freitoleranz nach General tolerance	
CAD-Zeichnung, keine manuellen Änderungen CAD drawing, no manual modifications allowed	
1. Verwendung: First Use:	
Blatt: Sheet:	
Zeichnung Nr. / Drawing No. R1.180.0420.0 01K	
Maße in mm / Dimensions are in mm	
Datei / File: 031161_B01K_R1.180.0420.0.DCD	
Ersatz für / Replacement for:	
Type	
Benennung / Title	
Maßbildzeichnung/dimension drawing Standardgehäuse mit Busstecker u. Zapfen Baubreite 22,5mm, Federkraftklemme steckbar standard housing with bus connector and pintle overall 22,5mm, plug-in clamp-spring terminal	
Wieland	
Index	
Änderung / Revision	